


Ed Sementini's Town & Country

37 OLD REDDING ROAD, REDDING, CT 06896

GARAGE DOOR OPERATOR "UNIVERSAL" PRE-WIRING DIAGRAM

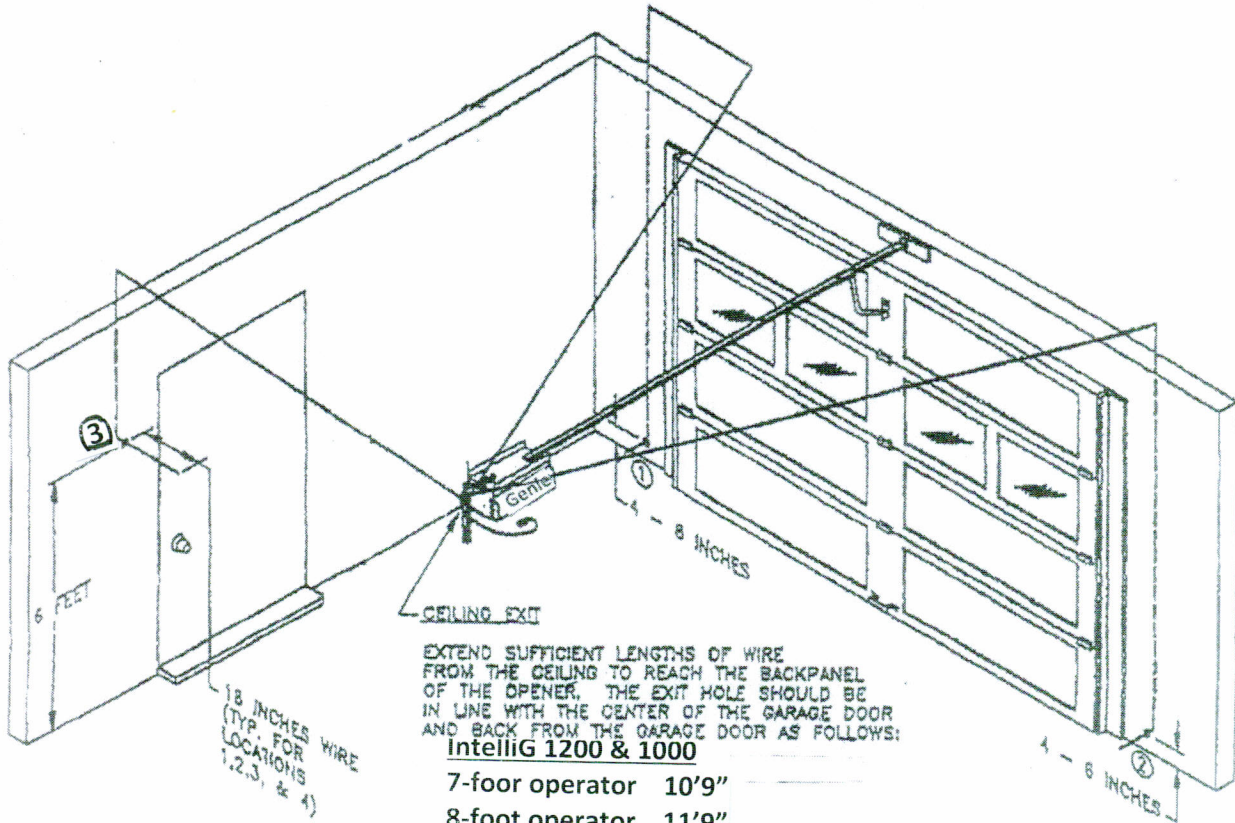

EXTEND SUFFICIENT LENGTHS OF WIRE FROM THE CEILING TO REACH THE BACKPANEL OF THE OPENER. THE EXIT HOLE SHOULD BE IN LINE WITH THE CENTER OF THE GARAGE DOOR AND BACK FROM THE GARAGE DOOR AS FOLLOWS:

IntelliG 1200 & 1000

7-foot operator	10'9"
8-foot operator	11'9"
9-foot operator	13'4"
10-foot operator	14'4"

Required:

PRE-WIRING FOR PHOTOELECTRIC SENSORS OR EDGE SENSORS

- 2-CONDUCTOR WIRE (22 GA) FROM LOCATION ① TO EXIT CEILING ABOVE OPERATOR.
- 2-CONDUCTOR WIRE (22 GA) FROM LOCATION ② TO EXIT CEILING ABOVE OPERATOR.

Required:

PRE-WIRING FOR PUSHBUTTON

- 2-CONDUCTOR WIRE (22 GA.) FROM LOCATION ③ TO EXIT CEILING ABOVE OPERATOR.

NOTE: CHECK LOCAL BUILDING CODES; ONLY USE UL LISTED MATERIAL.

NOTE: CHECK MANUFACTURERS' PRE-WIRING BULLETINS FOR FURTHER DETAILS.